Gas Cooktops

Installation Specifications

CH612XFF
CH712XFF
CH913XFF
CH1200XFF

From the most delicate simmer to the demands of a super fast stir-fry, Kleenmaid gas cooktops deliver the instantaneous heat control you need to bring out the gourmet chef in you.

Fast, flexible and economical, Kleenmaid's gas cooktops are ideally suited to today's ever changing lifestyle and exotic culinary tastes.

Available in four sizes, there is a Kleenmaid gas cooktop to suit every kitchen design and style.

Features

Available sizes:	600, 700, 900 and 1200mm
Connection:	LPG or natural gas connection
Finish:	Brushed stainless steel
Components:	Cast iron pan supports, burner caps and wok trivets
Safety feature:	Flame failure safety cut-out
Ignition:	Automatic one step electronic ignition
Wok burner:	Triple ring wok burner for high intensity heat

10
10 Year Warranty*

For your nearest store call 13 13 08
www.kleenmaid.com.au

Kleenmaid
The best you can own.

Gas Cooktops

Installation Specifications

CH612XFF
CH712XFF
CH913XFF
CH1200XFF

CH612XFF

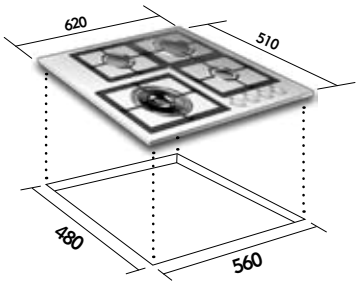

CH712XFF

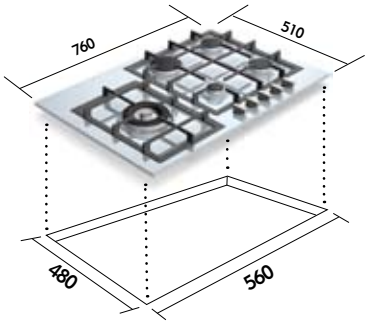

CH913XFF

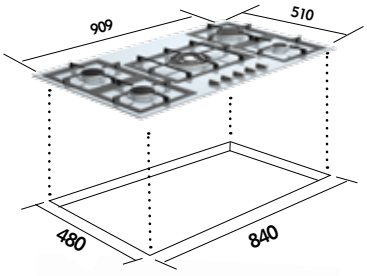

CH1200XFF



NOTE: Depth below benchtops on all the above cooktops = 55mm

Model	Approval No.	Electrical Ratings	Inlet Position	Inlet (mm) From Side	Inlet (mm) From Rear
CH612XFF	QO3754	240V 50HZ 10A GPO	LHS Rear	50	39
CH712XFF			LHS Rear	105	40
CH913XFF			RHS Rear	60	39
CH1200XFF			RHS Rear	40	40

Installation

1. Spread out the gasket "C" directly to the base of the hob before installing the appliance into the bench cut out. Note that the gap between the base pan and the hob top must be well sealed with the gasket.
2. Slot in the cooking hob into the cut out of the workbench and locate it correctly.
3. Adjust the clamps "A" and tighten the screws "B" until the hob is firmly secured.
4. Using a sharp tool, trim any excess gasket protruding from the edge of the hob.
5. Assemble the three piece burners. Take care to properly locate the assembled burner on the burner base.

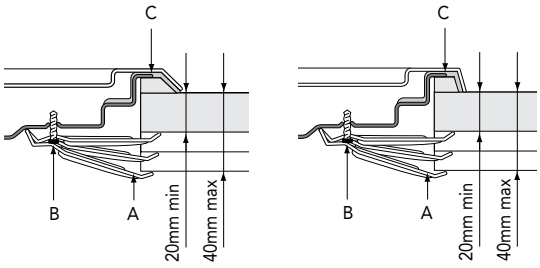

CLEARANCES BETWEEN GAS COOKTOPS COMBUSTIBLE MATERIALS & HOODS

The rangehood must be placed at a minimum distance of 650mm above electric, gas or mixed cooktops. The recommended height for the canopy or island rangehood is 750mm. Please confirm these measurements with your local Building Authority.

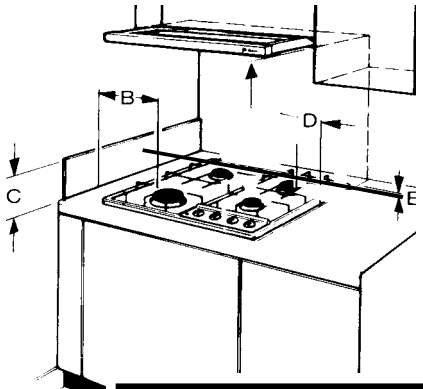

Clearance	Dimensions
A	650mm+
B	200mm+ or 257mm+ for Wok
C	150mm+

As standard, when connected to N.G. the regulator supplied should be fitted to the 1/2" MALE BSP elbow at the rear of the appliance.
All gas cooktops are supplied in natural gas format with an LPG conversion kit and should be converted by the installer.

*Technical Specifications and product sizes can be varied by Manufacturer without notice. Any cut-outs for appliances should only be by physical measurements. Drawings are not to scale. All information supplied is for general reference purposes only and is on the understanding that Kleenmaid Pty Ltd will not be liable for any loss, liability or damage whatsoever arising as a result of reliance of such information.

10
10 Year Warranty*

For your nearest store call 13 13 08
www.kleenmaid.com.au

Kleenmaid
The best you can own.

Gas Cooktops

Installation Specifications

CH612XFF
CH712XFF
CH913XFF
CH1200XFF

TECHNICAL DATA

NATURAL GAS BURNER TYPES AND POWER OUTPUTS: Mj/h

MODEL	Wok	Rapid	Semi Rapid	Auxiliary	Total Mj/h
	Max	Max	Max	Max	Max
CH611X CH611W	14.5	11.2	6.6	3.9	36.2
CH611XFF CH611WFF	14.5	11.2	6.6	3.9	36.2
CH612XFF	12.6	11.2	6.6	3.9	34.3
CH711XFF	14.5	11.2	6.6	3.9	42.8
CH712XFF	12.6	11.2	6.6	3.9	40.9
CH911XFF	14.5	11.2	6.6	3.9	54.0
CH913XFF	12.6	11.2	6.6	3.9	40.9
CH915XFF CH915AFF	14.5	11.2	6.6	3.9	54.0
CH920XFF	14.5	11.2	6.6	3.9	42.8
CH1200XFF	12.6	11.2	6.6	3.9	34.3

PROPANE GAS BURNER TYPES AND POWER OUTPUTS: Mj/H

MODEL	Wok	Rapid	Semi Rapid	Auxiliary	Total Mj/h
	Max	Max	Max	Max	Max
CH611X CH611W	15.0	11.4	6.3	4.0	36.7
CH611XFF CH611WFF	15.0	11.4	6.3	4.0	36.7
CH612XFF	13.0	11.4	6.3	4.0	34.7
CH711XFF	15.0	11.4	6.3	4.0	43.0
CH712XFF	13.0	11.4	6.3	4.0	41.0
CH911XFF	15.0	11.4	6.3	4.0	54.4
CH913XFF	13.0	11.4	6.3	4.0	41.0
CH915XFF CH915AFF	15.0	11.4	6.3	4.0	54.4
CH920XFF	15.0	11.4	6.3	4.0	43.0
CH1200XFF	13.0	11.4	6.3	4.0	34.7

JET SIZING CONVERSION TABLE: NATURAL GAS/LPG

MODEL	Wok		Rapid		Semi Rapid		Auxiliary	
	NG	LPG	NG	LPG	NG	LPG	NG	LPG
CH611X CH611W	1.65/0.70	1.00/0.44	1.55	0.94	1.17	0.70	0.92	0.56
CH611XFF CH611WFF	1.65/0.70	1.00/0.44	1.55	0.94	1.17	0.70	0.92	0.56
CH612XFF	1.63	1.0	1.55	0.94	1.17	0.70	0.92	0.56
CH711XFF	1.65/0.70	1.00/0.44	1.55	0.94	1.17	0.70	0.92	0.56
CH712XFF	1.63	1.0	1.55	0.94	1.17	0.70	0.92	0.56
CH911XFF	1.65/0.70	1.00/0.44	1.55	0.94	1.17	0.70	0.92	0.56
CH913XFF	1.63	1.0	1.55	0.94	1.17	0.70	0.92	0.56
CH915XFF CH915AFF	1.65/0.70	1.00/0.44	1.55	0.94	1.17	0.70	0.92	0.56
CH920XFF	1.65/0.70	1.00/0.44	1.55	0.94	1.17	0.70	0.92	0.56
CH1200XFF	1.63	1.0	1.55	0.94	1.17	0.70	0.92	0.56

10
10 Year Warranty*

For your nearest store call 13 13 08
www.kleenmaid.com.au

Kleenmaid
The best you can own.